Roughclaw

RCA-GDR001-26

GRID DISH REFLECTOR
User's Manual

10. The Grid dish should be similar with the antenna direction of your original antenna.

11. Tighten the U-clamp to hold the Dish Grid system.

Note:
The antenna now is reversed from the original position.

Tools

Make sure to have the following tools when assembling your Grid Disk Reflector.
- Bolt wrench
- Screw driver
- Ladder

Before you begin.. **TURN OFF ALL POWER** connecting to the antenna system.

Assembly

1. Align the Front plate, Grid Dish, Right Angle plate, and the backplate.

2. Insert the 4 pieces of bolt on the four holes to hold the four parts together.

3. Tighten the nut until the four plates hold firmly.

4. Remove your Antenna from the old mast and take note of the direction of the front.

5. Locate the front of the antenna and draw a cross hash (+) 15mm from the top of the lateral vertical center. Use a pencil to mark this point.

6. Mount the Antenna on the U-boom with the front surface area facing the center of the Grid.

7. Align the cross hash (+) so that it will align with the center of the Grid dish.

8.Mount the antenna firmly on the U- boom by using the supplied Antenna metal Wrap.

9.With all the Dish system assembled, mount the Grid dish system on the mast.

Parts Check List

Make sure your package includes the items shown below:

Grid Dish 	Mast Clamp
Front Plate	Right Angle Plate
U-Boom_Backplate assemly 	Metal wrap
	Bolt and Nuts D6xL60 mm - 2 pcs D6xL35mm - 2 pcs D6xL23mm - 4 pcs

Assembly

1. Align the Front plate, Grid Dish, Right Angle plate, and the backplate.

2. Insert the 4 pieces of bolt on the four holes to hold the four parts together.

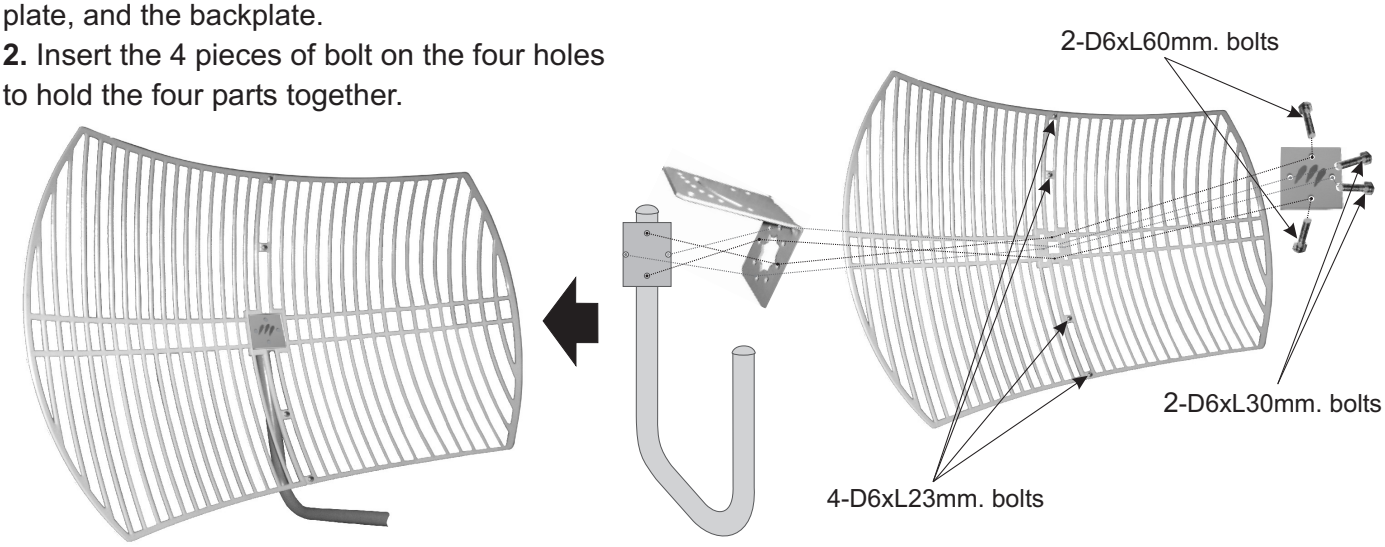

3. Tighten the nut until the four plates hold firmly.

4. Remove your Antenna from the old mast and take note of the direction of the front.

5. Locate the front of the antenna and draw a cross hash (+) 15mm from the top of the lateral vertical center. Use a pencil to mark this point.

6. Mount the Antenna on the U-boom with the front surface area facing the center of the Grid.

7. Align the cross hash (+) so that it will align with the center of the Grid dish.

8.Mount the antenna firmly on the U- boom by using the supplied Antenna metal Wrap.

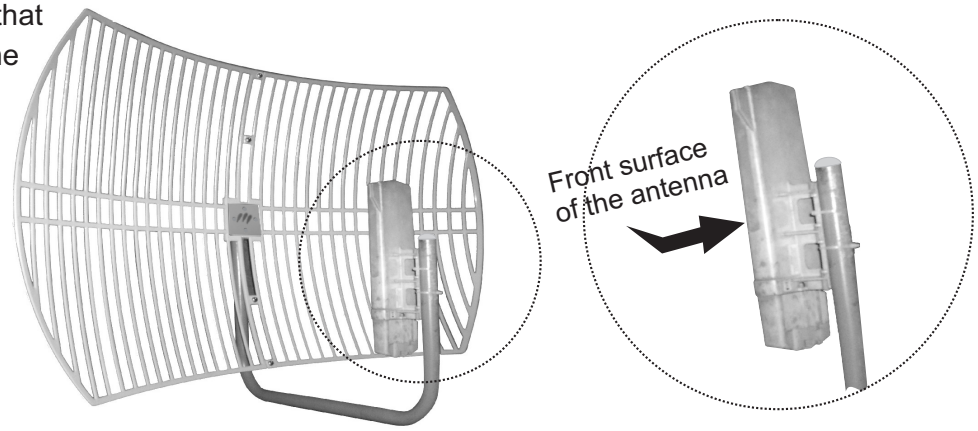

9.With all the Dish system assembled, mount the Grid dish system on the mast.

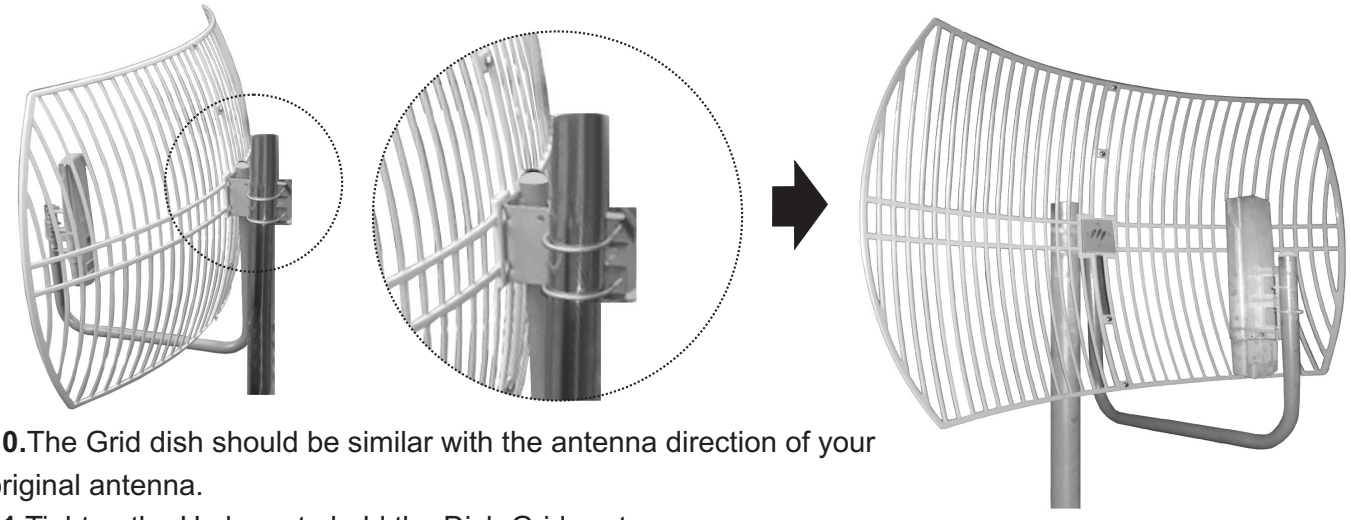

10. The Grid dish should be similar with the antenna direction of your original antenna.

11. Tighten the U-clamp to hold the Dish Grid system.

Note:

The antenna now is reversed from the original position.